

Figure 1. server and client runs on the same laptop behind the NAT

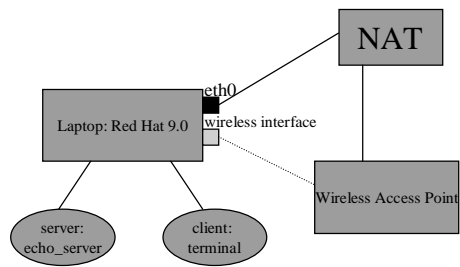


Figure 2. Client has two interfaces (wired and wireless).